



NOTE:
 ~WASHERS TO BE APPLIED IN ALL APPLICATION WHERE ALUMINUM SURFACES CONTACT BOLT HEADS & NUTS
 ~GROMMET TO BE APPLIED WHERE NECESSARY TO PROTECT WIRING
 ~AXLE MTG □TOP ☒BOTTOM OF SPRING
 ~SPRING MTG HOLE □TOP ☒BOTTOM

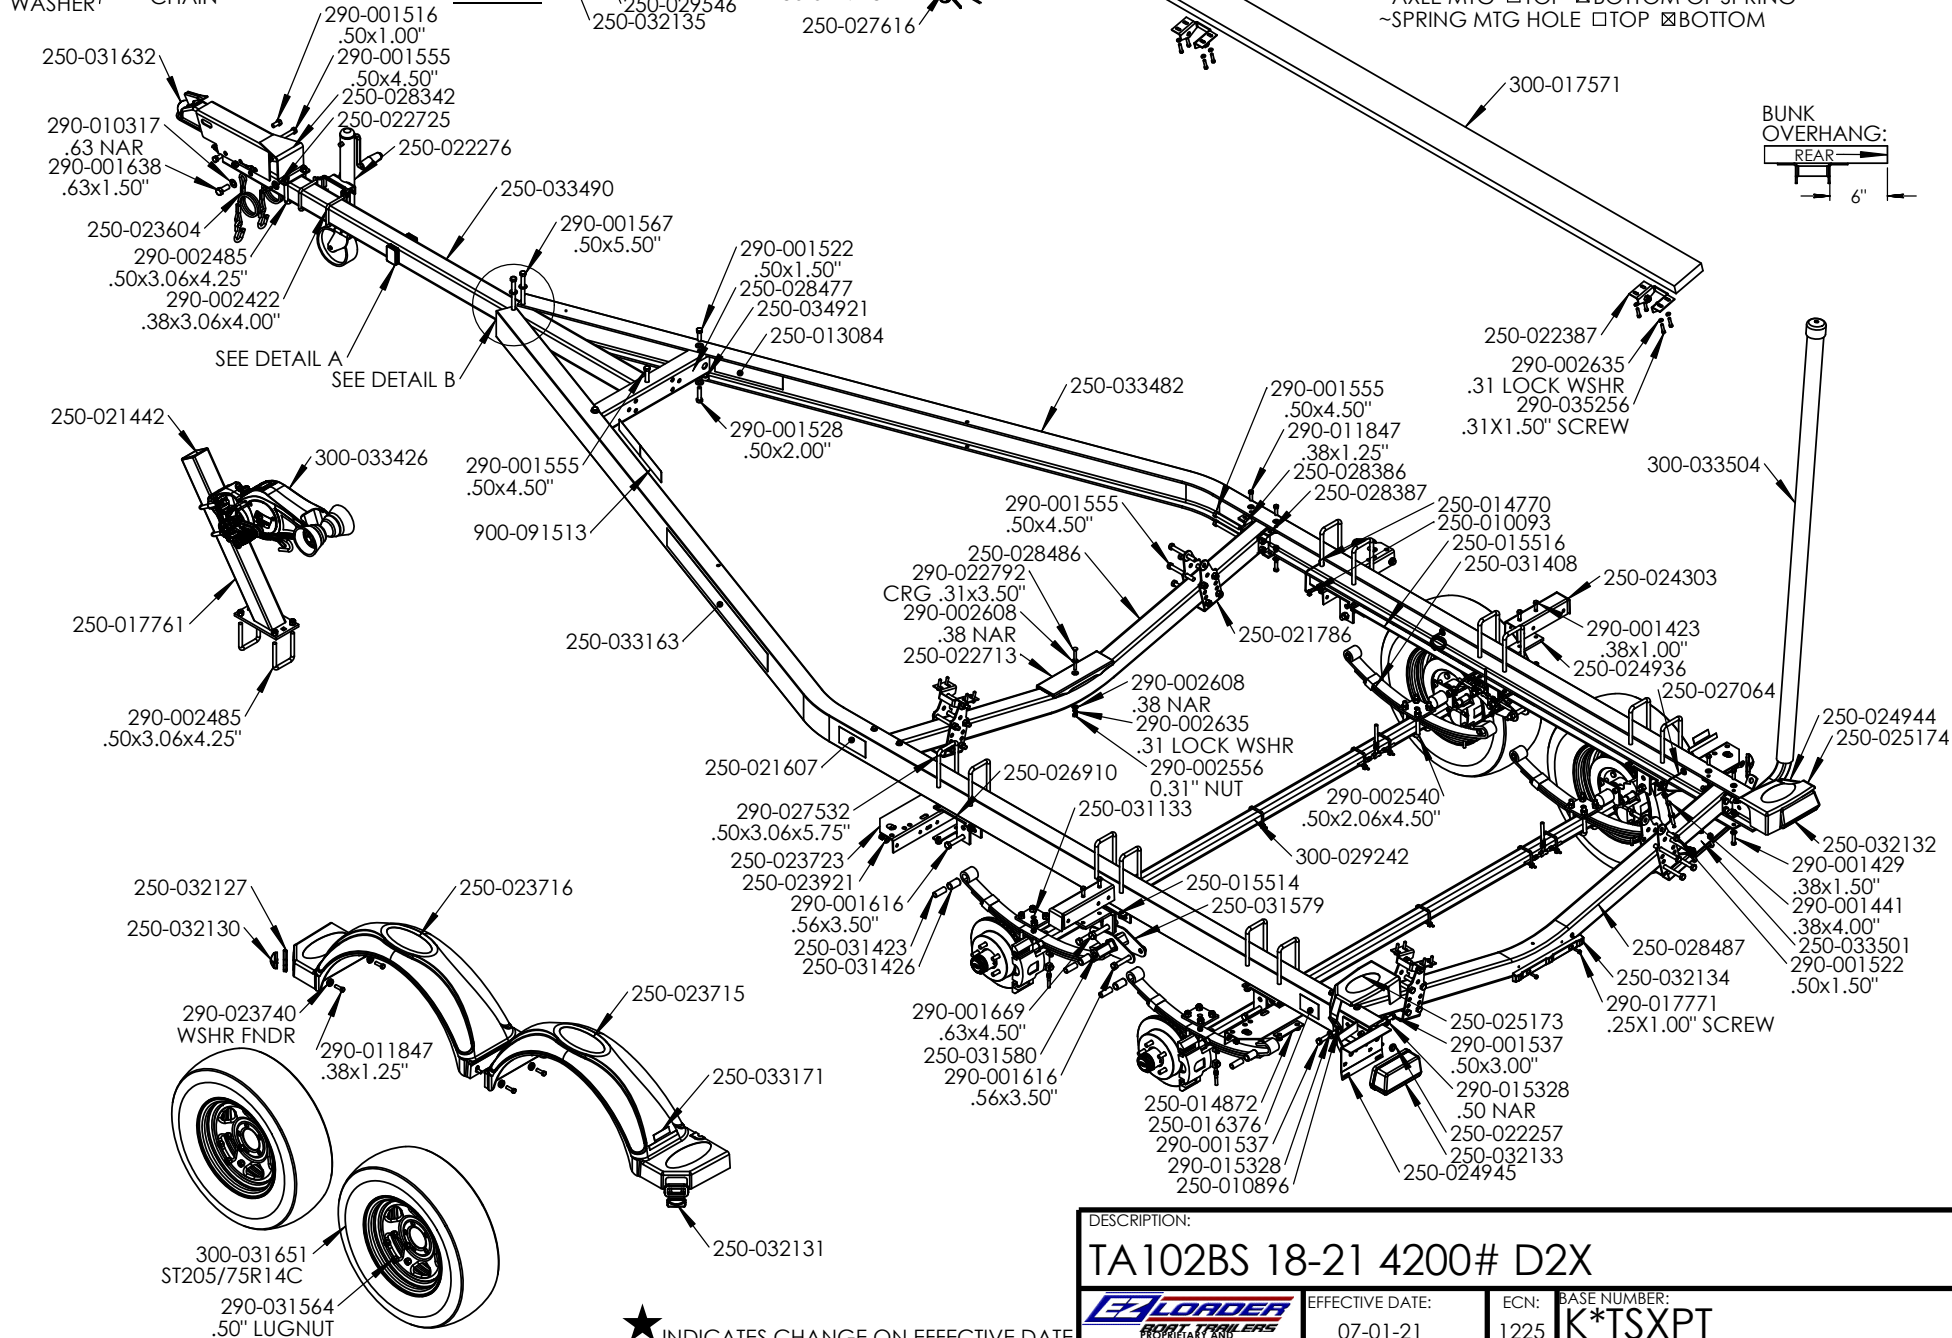

★ INDICATES CHANGE ON EFFECTIVE DATE

DESCRIPTION:			
TA102BS 18-21 4200# D2X			
EFFECTIVE DATE:	ECN:		BASE NUMBER:
	07-01-21		K*TSXPT

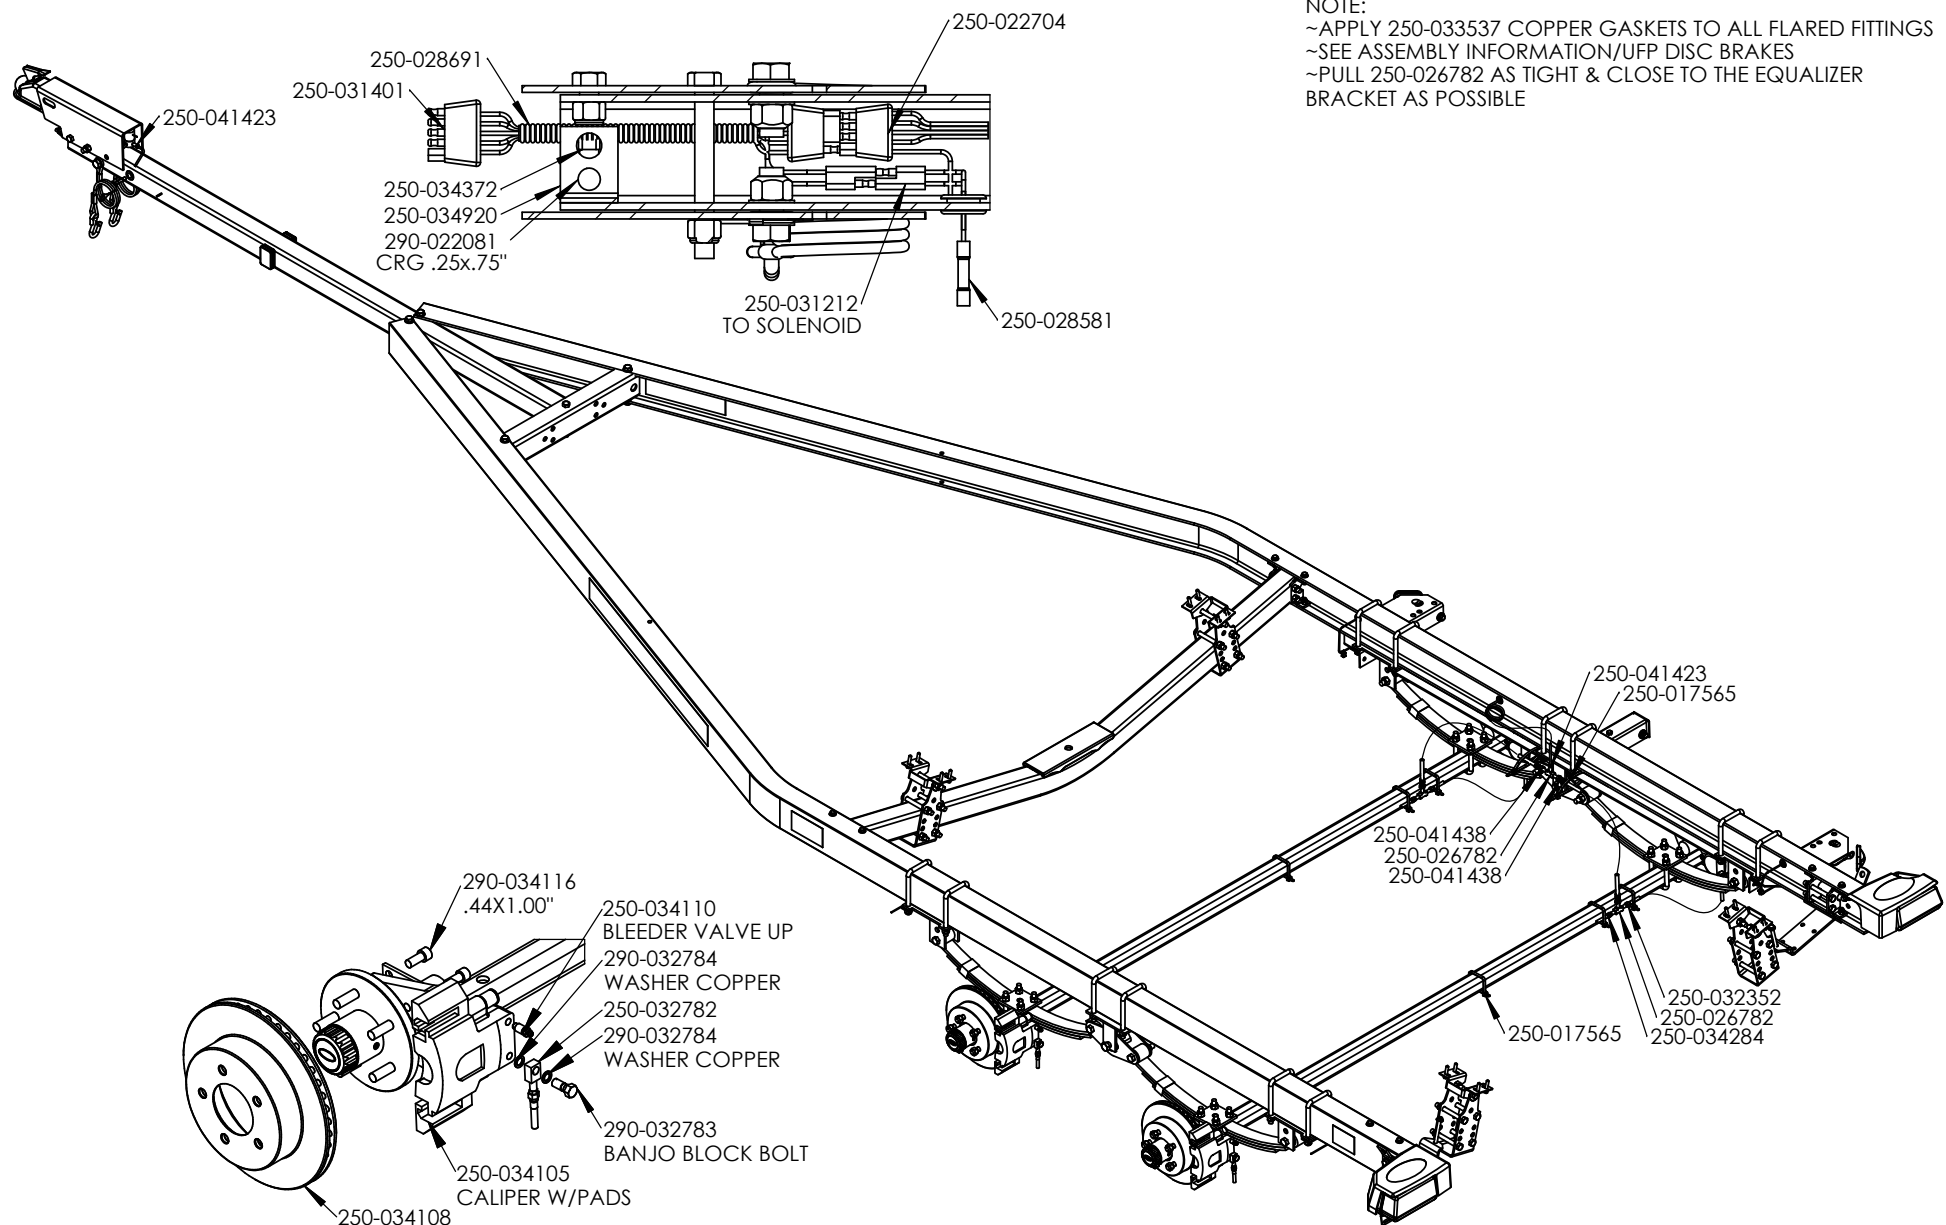

NOTE:
 ~APPLY 250-033537 COPPER GASKETS TO ALL FLARED FITTINGS
 ~SEE ASSEMBLY INFORMATION/UFP DISC BRAKES
 ~PULL 250-026782 AS TIGHT & CLOSE TO THE EQUALIZER
 BRACKET AS POSSIBLE

★ INDICATES CHANGE ON EFFECTIVE DATE

DESCRIPTION:

TA102BS 18-21 4200# D2X

EX-LOADER
 FLAT TRAILERS
 PROPRIETARY AND
 CONFIDENTIAL INFORMATION

EFFECTIVE DATE:
 07-01-21

ECN:
 1225

BASE NUMBER:
 K*TSXPT