


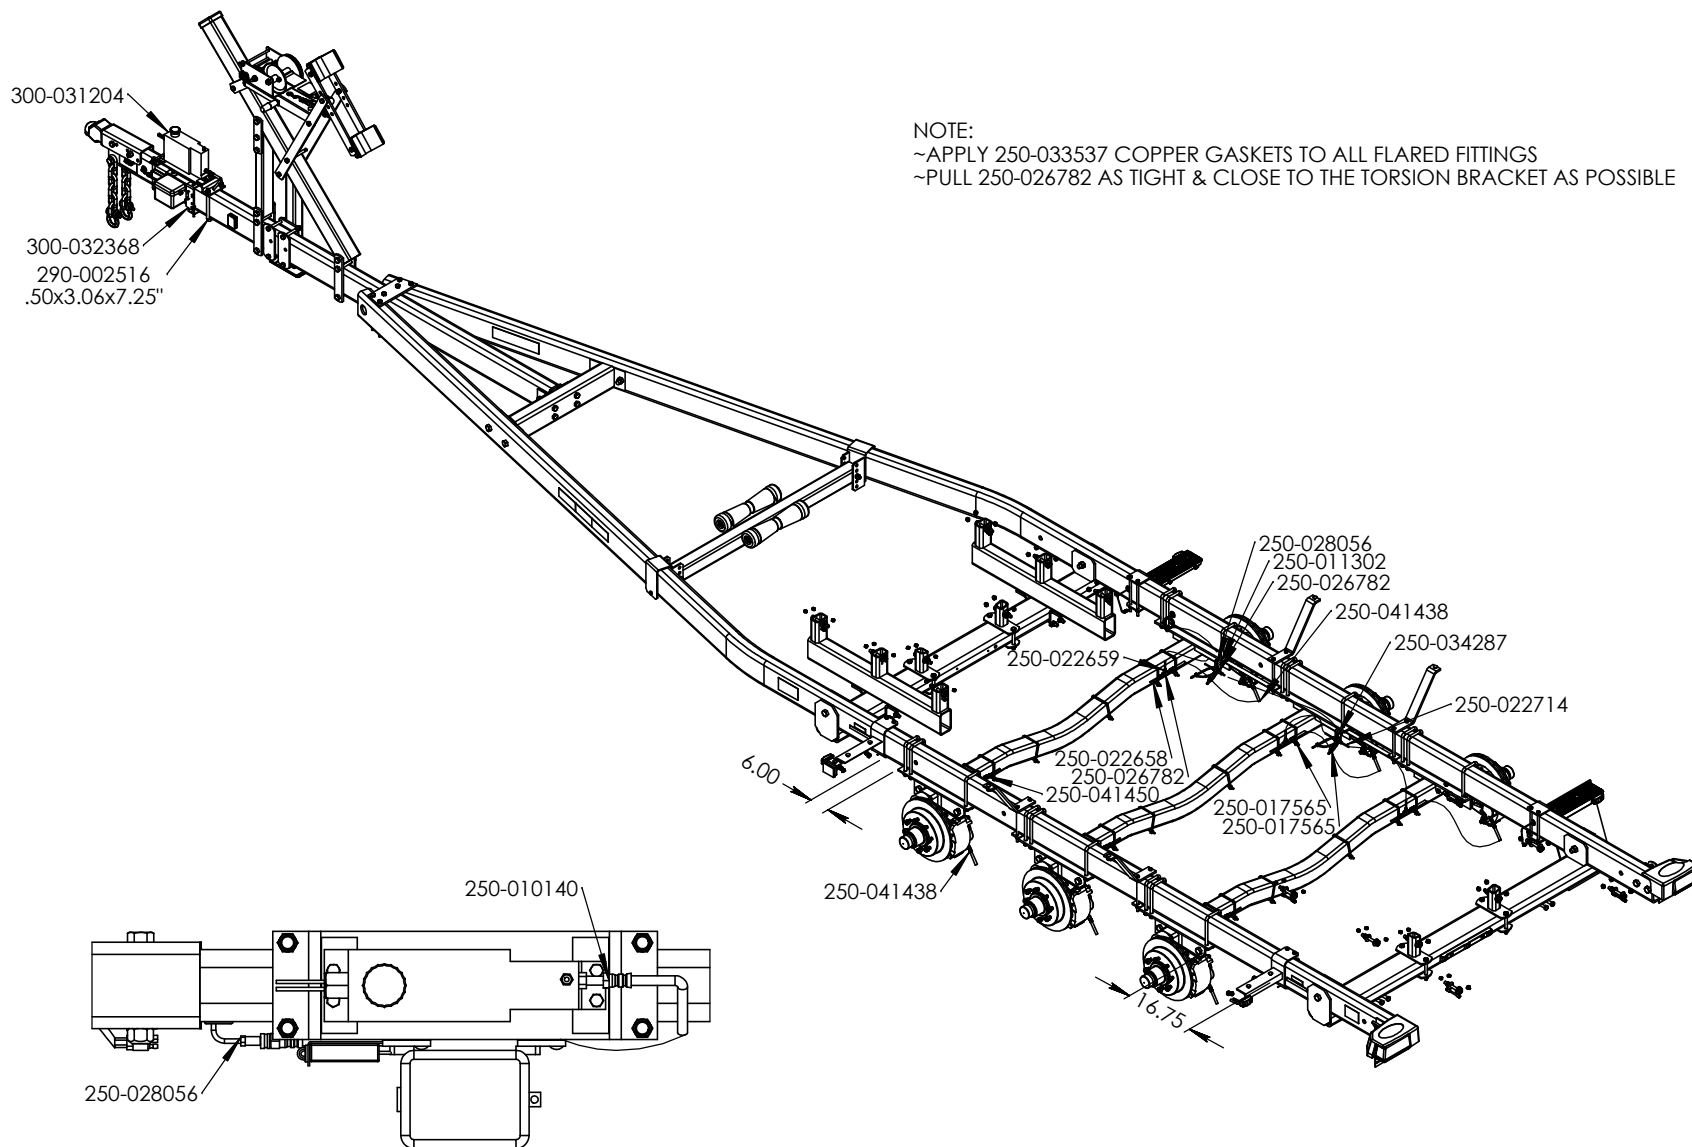

NOTE:

~APPLY 250-033537 COPPER GASKETS TO ALL FLARED FITTINGS

~PULL 250-026782 AS TIGHT & CLOSE TO THE TORSION BRACKET AS POSSIBLE

NOTE:

RUN 250-010140 BEHIND THE
BATTERY BOW AND UNDER
300-032368

★ INDICATES CHANGE ON EFFECTIVE DATE

DESCRIPTION:


TI102BT 29-31 16500 ELE/HYD D3X (BASE)



EFFECTIVE DATE:
06-07-21

ECN:
1210

BASE NUMBER:
K*TAR5Z

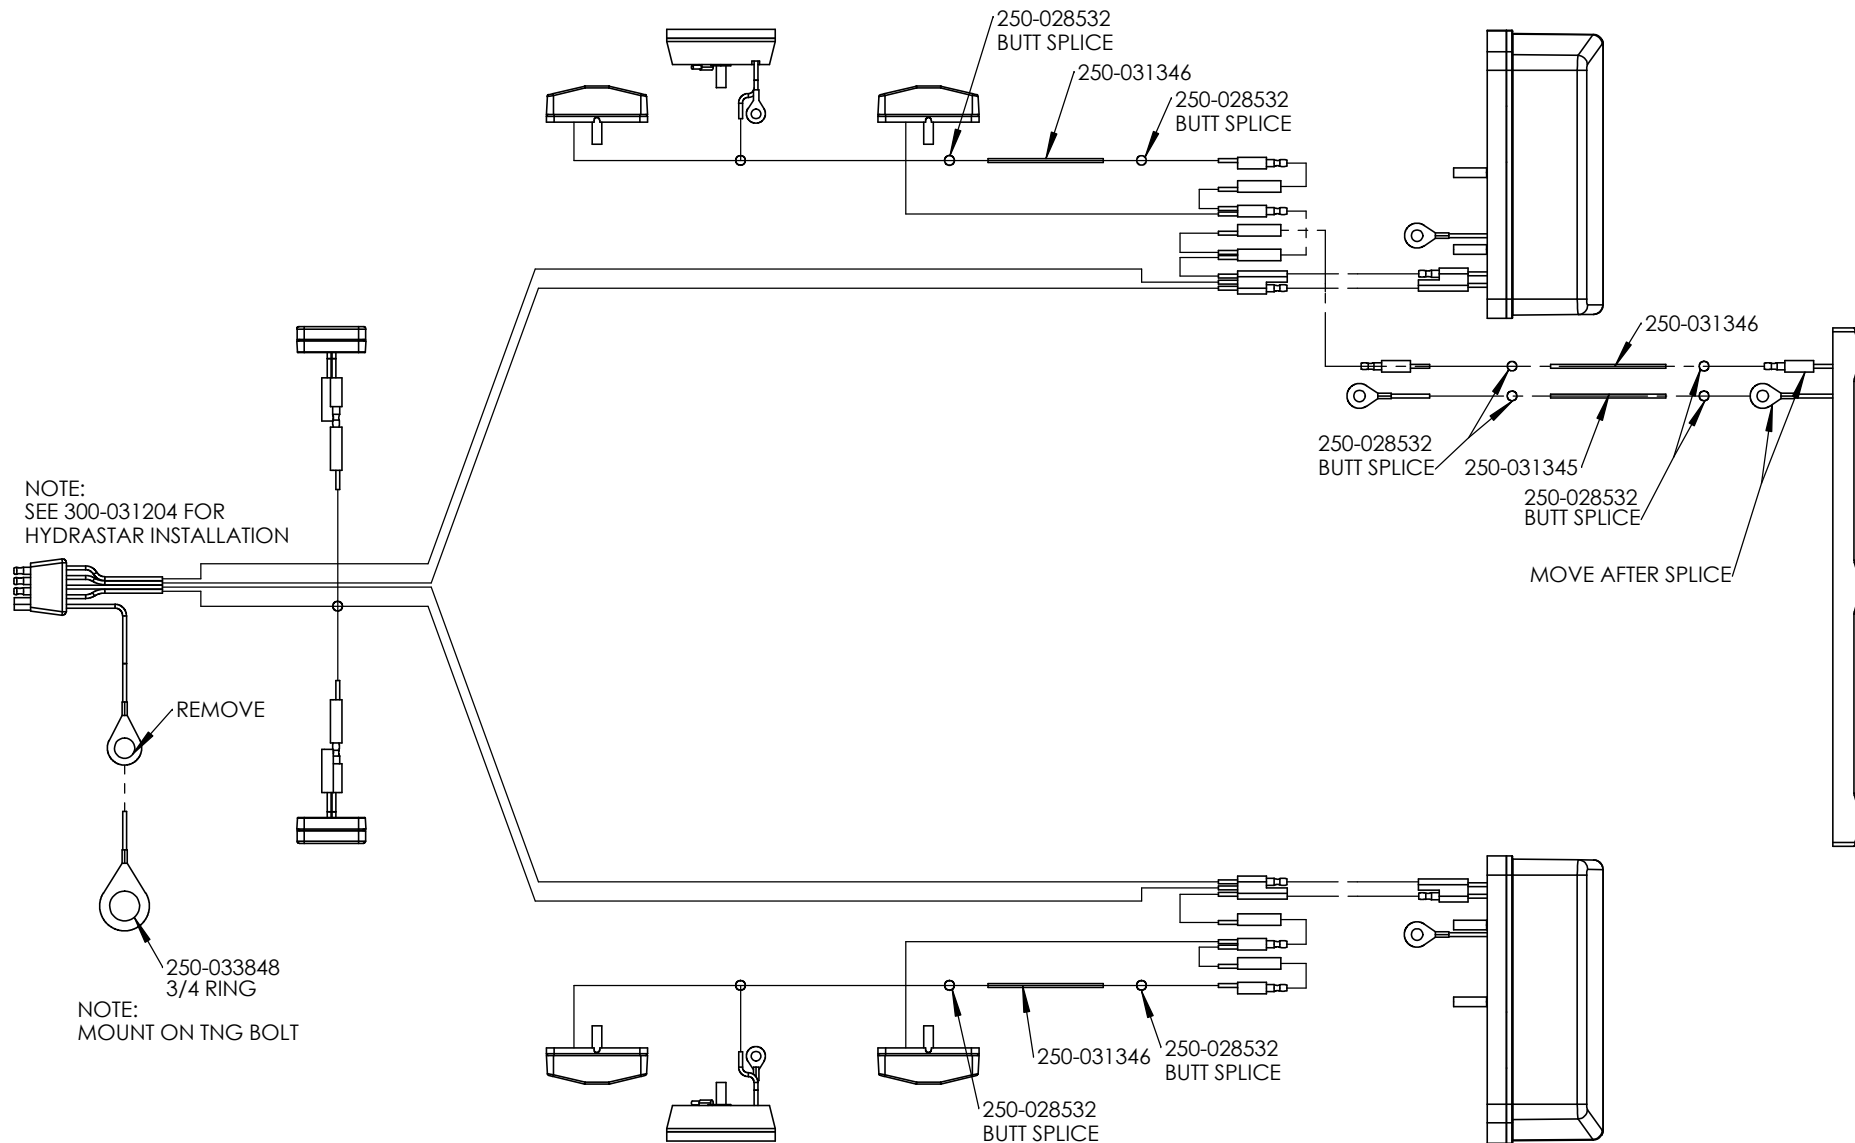

DESCRIPTION:

TI102BT 29-31 16500 ELE/HYD D3X (BASE)



EFFECTIVE DATE:
06-07-21

ECN:
1210

BASE NUMBER:
K*TAR5Z

★ INDICATES CHANGE ON EFFECTIVE DATE