



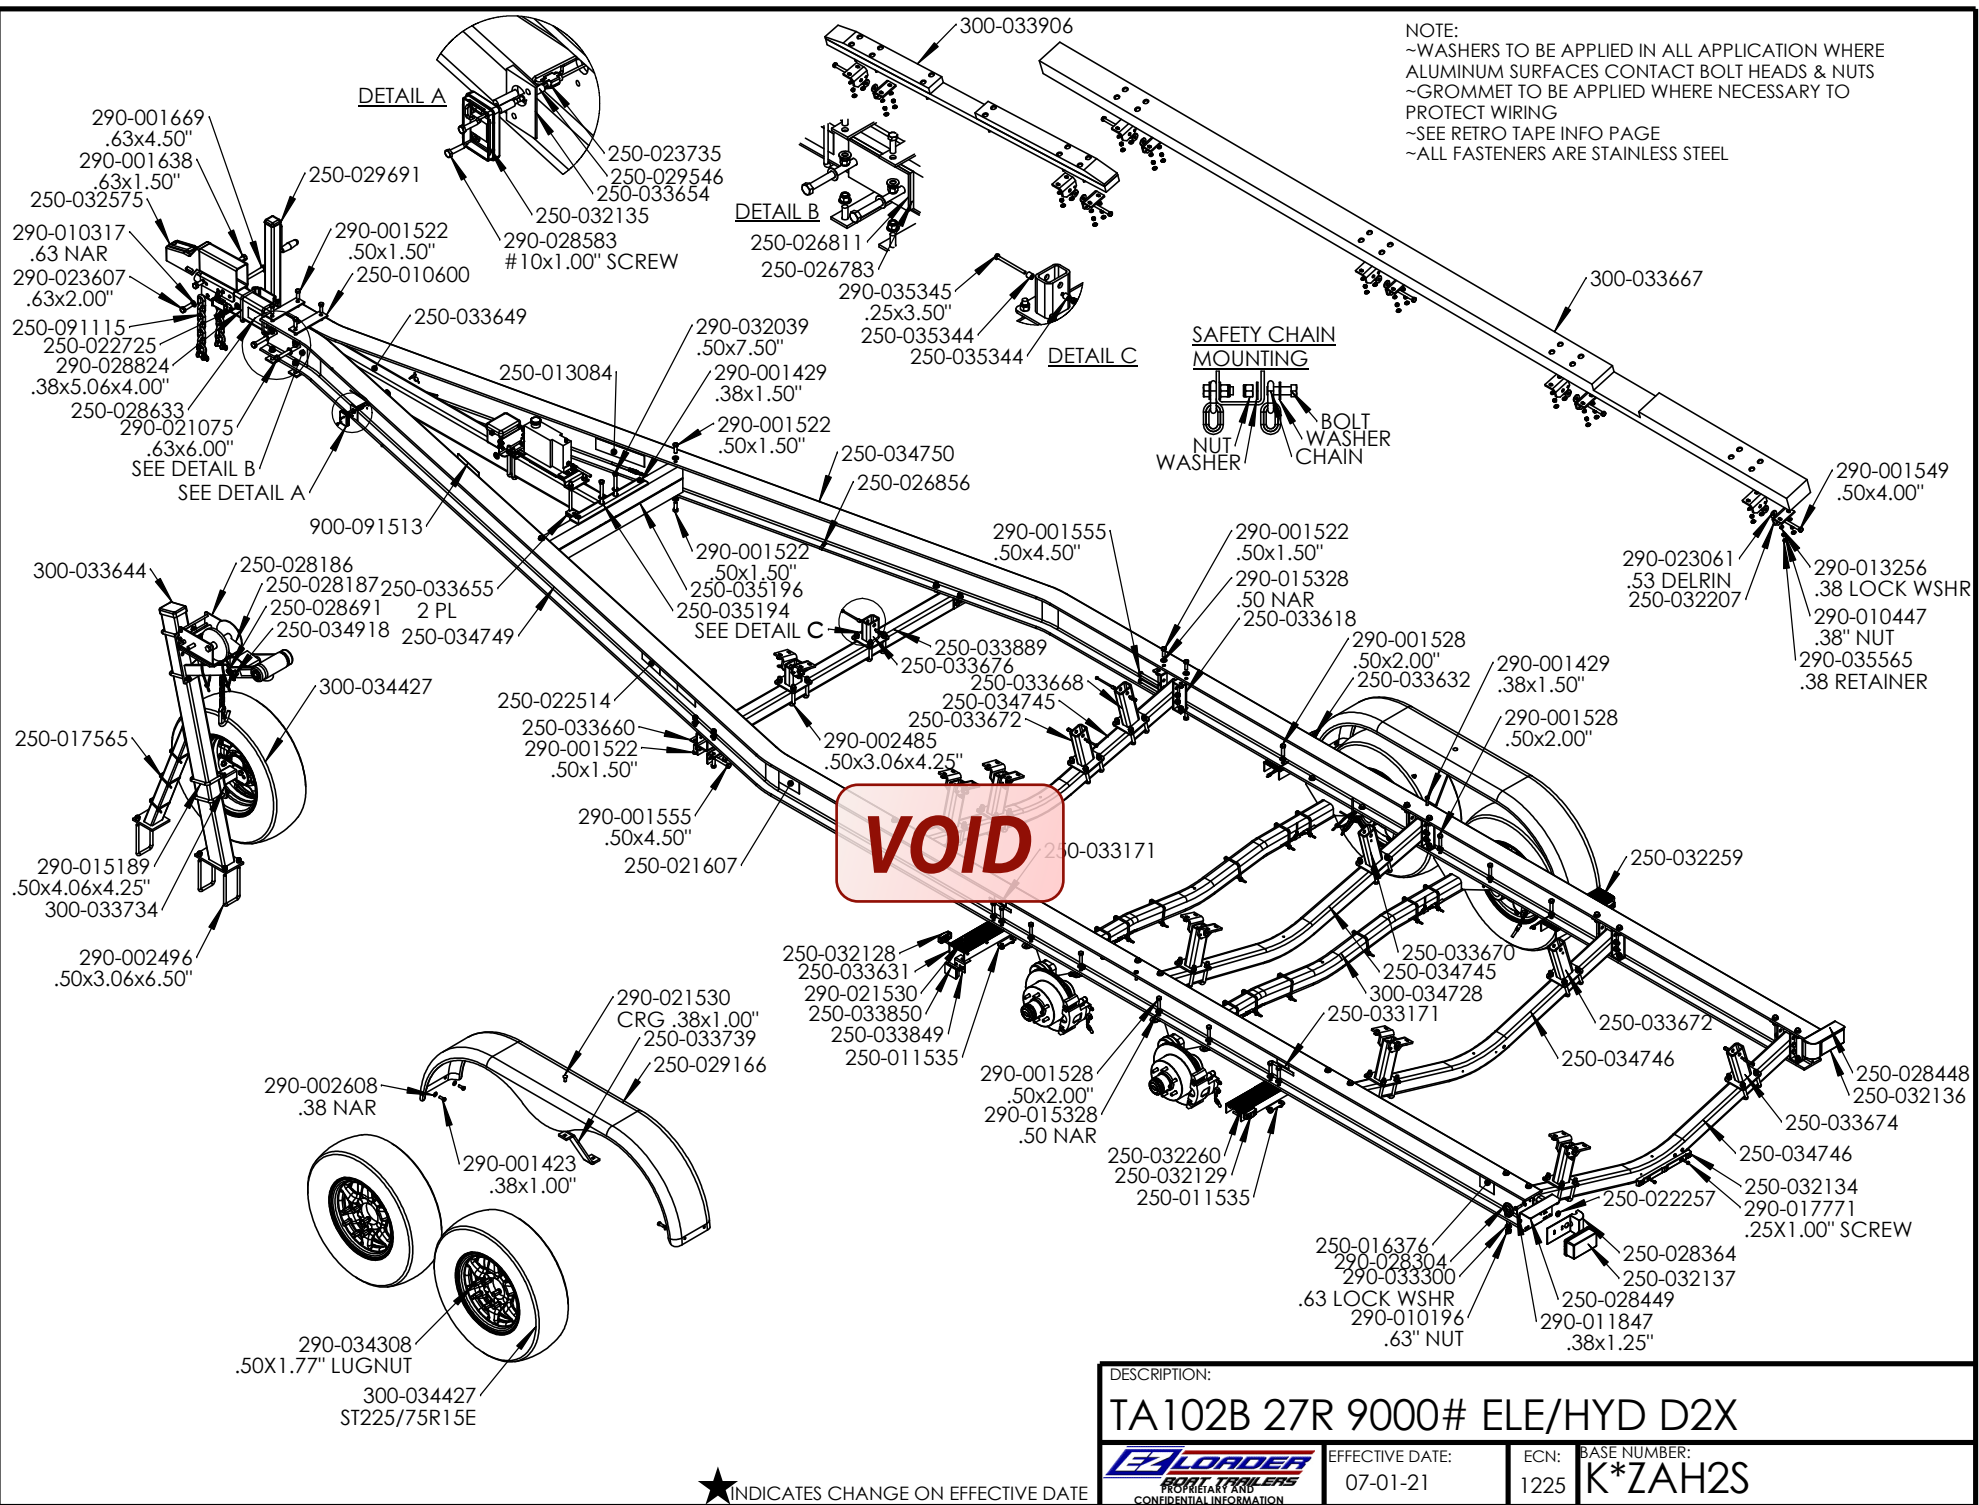

NOTE:
 ~APPLY 250-033537 COPPER GASKET TO ALL FLARED FITTINGS
 ~SEE ASSEMBLY INFORMATION/UFP DISC BRAKES
 ~PULL 250-026782 AS TIGHT & CLOSE TO THE TORSION BRACKET AS POSSIBLE

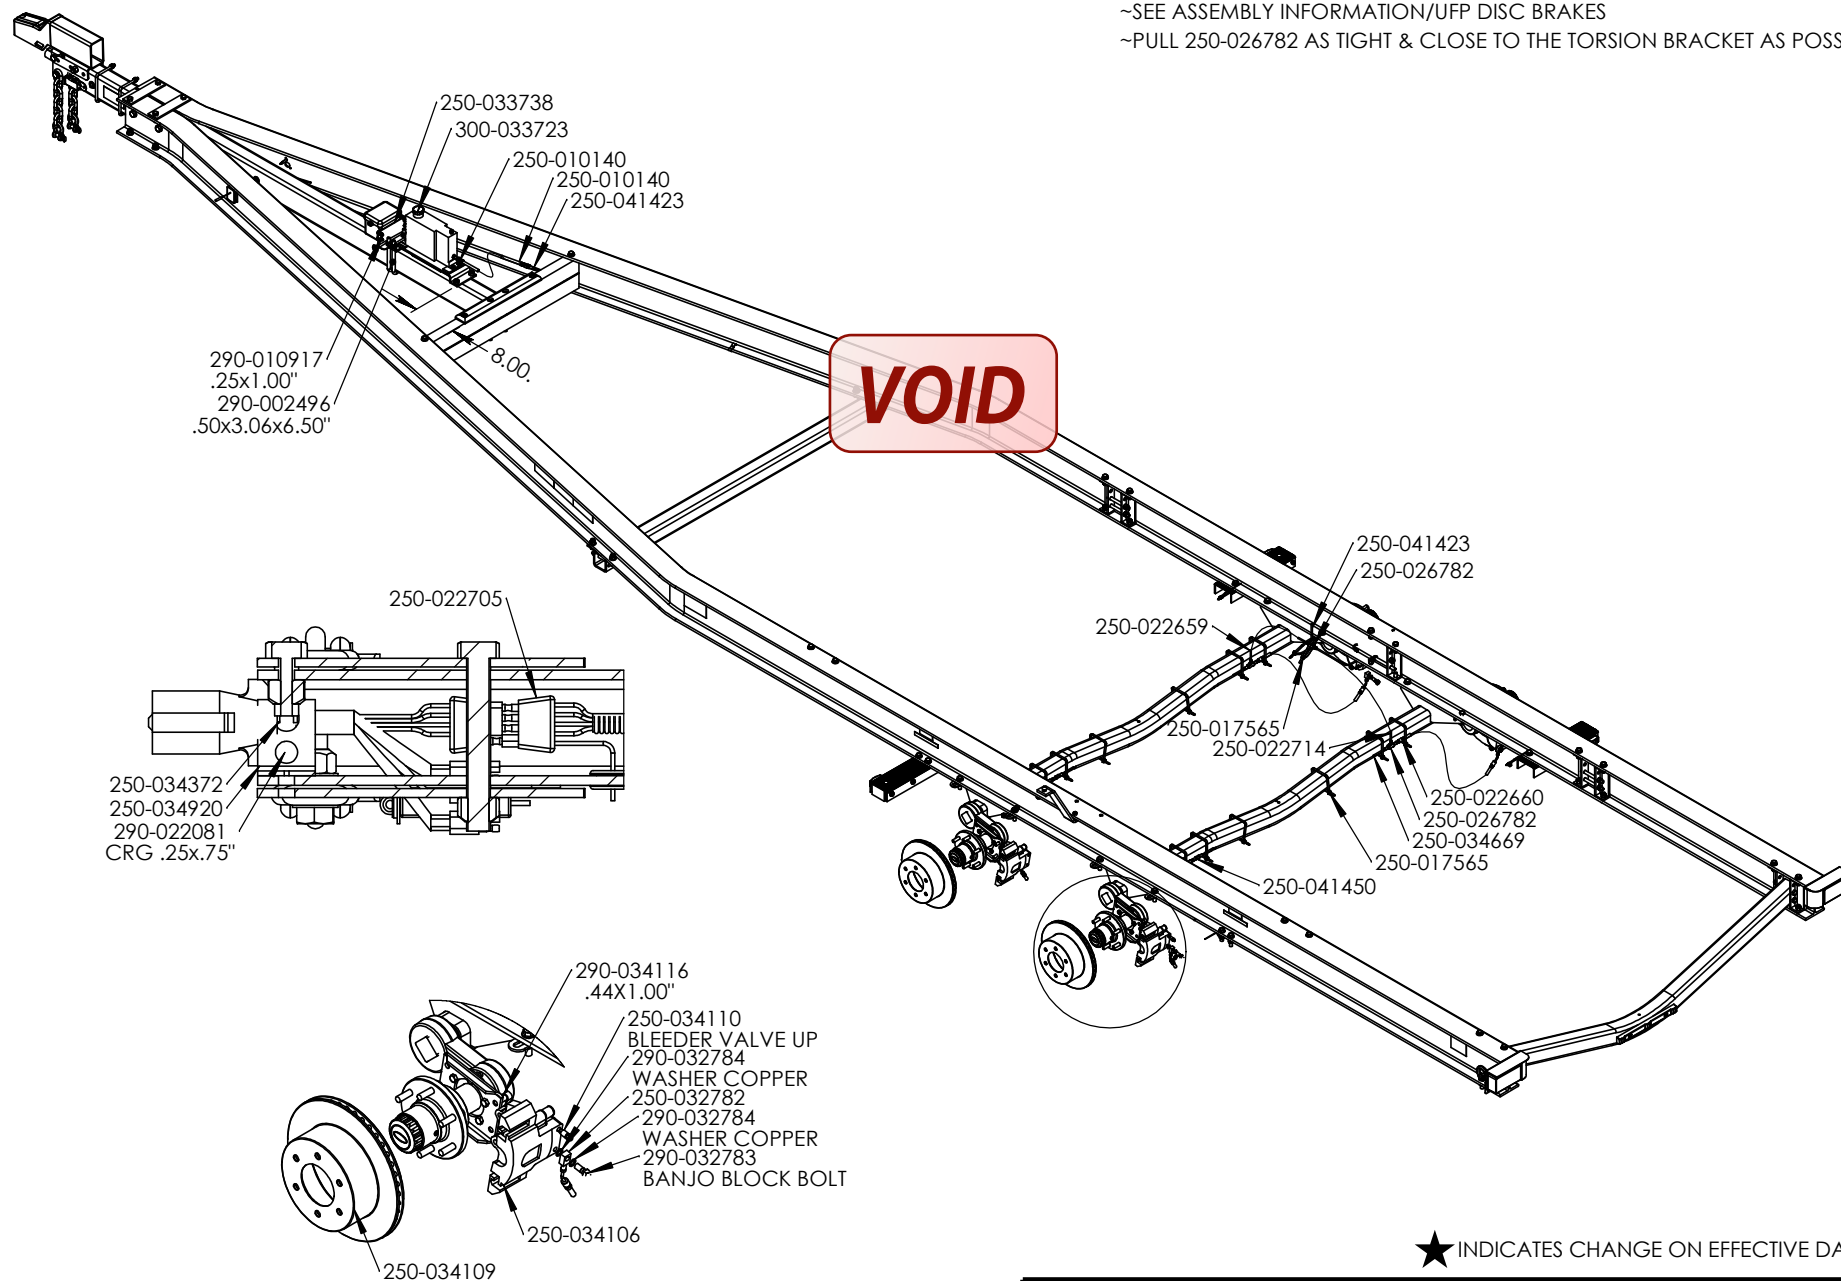

★ INDICATES CHANGE ON EFFECTIVE DATE

DESCRIPTION:


TA102B 27R 9000# ELE/HYD D2X



EFFECTIVE DATE:
 07-01-21

ECN:
 1225

BASE NUMBER:
 K*ZAH2S

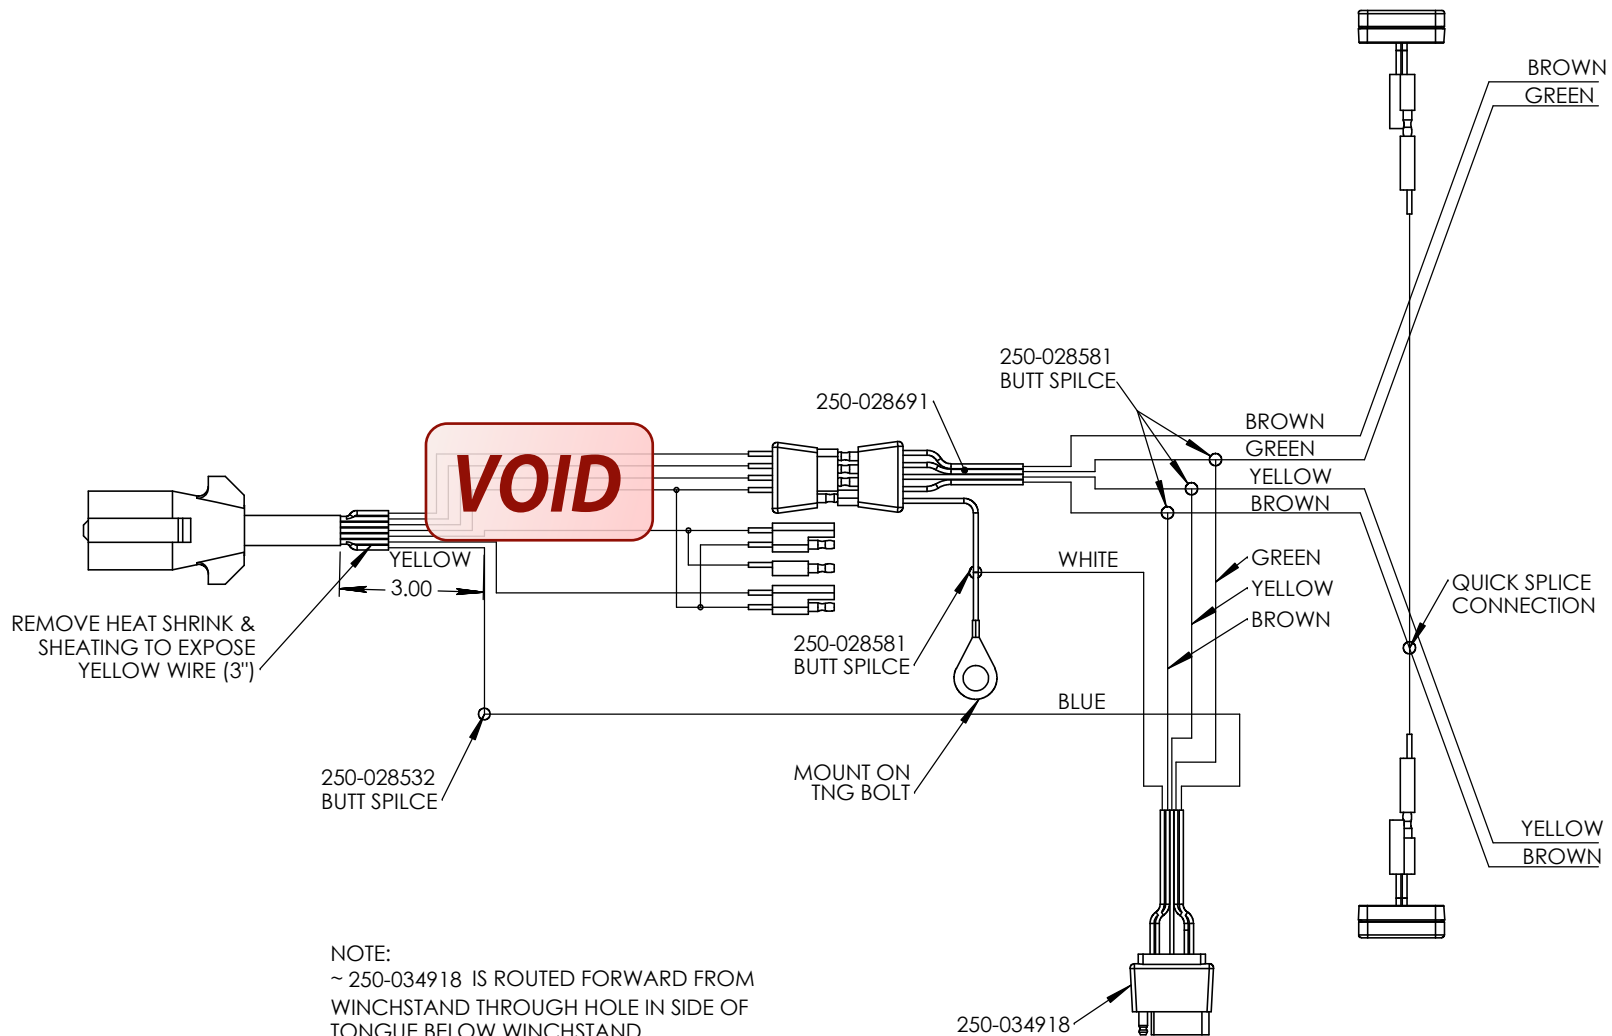

NOTE:
 ~ 250-034918 IS ROUTED FORWARD FROM WINCHSTAND THROUGH HOLE IN SIDE OF TONGUE BELOW WINCHSTAND
 ~APPLY 250-028691 WIRELOOM TO WINCHSTAND HARNESS

DESCRIPTION:

TA102B 27R 9000# ELE/HYD D2X



EFFECTIVE DATE:
07-01-21

ECN:
1225

BASE NUMBER:
K*ZAH2S

★ INDICATES CHANGE ON EFFECTIVE DATE